

GP Batteries


PRODUCT SPECIFICATION

**PD 30W Charger (2-port)
Model: WM2E**

Revision History

Revision	Date	Initiator	Reason for Change
0.0	3 March 2025	CC Li	First release

Prepared By	Approved By
CC Li	Joyce Tse
Date: 3 March 2025	Date: 3 March 2025

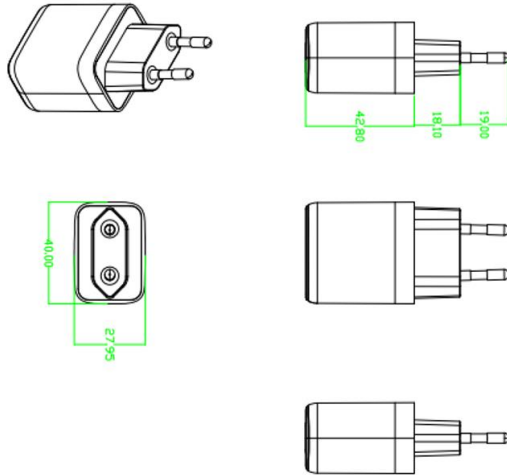

Product name	: PD 30W Charger, GS Plug (2-port)
Application	: Charge smartphones and other electronic products
Input	: AC 110-240V, 50/60Hz, 0.8A Max.
Output	: USB-C DC 5.0V/3.0A, 9.0V/3.0A, 12.0V/2.5A, 15.0V/2.0A, 20.0V/1.5A (30.0W Max.) USB-A DC 5.0V/3.0A, 9.0V/2.0A, 12.0V/1.5A (18.0W Max.) USB-C + USB-A DC 5.0V/3.0A (15.0W Max.)
Total output	: PD 30W
Number of ports	: USB-C x1, USB-A x1
Protection	: Over current protection (OCP) Short circuit protection (SCP)
Operation temperature	: 0°C to 25°C
Storage temperature	: -20°C to 80°C
Product dimension	: 80 (L) x 28 (W) x 40 (H) mm (Approx.)
Weight	: 55g (Approx.)
Compliance	: CE-LVD, CE-EMC, CE-ErP, ROHS, REACH
Warranty period	: 12 months from ex-factory date